

# SWIMMING POOL HOT TUB & SPA PERMIT REQUIREMENTS


**ALL POOLS, HOT TUBS, OR SPAS SHALL COMPLY WITH THE REQUIREMENTS OF THE 2015 INTERNATIONAL SWIMMING POOL AND SPA CODE. ALONG WITH A BUILDING PERMIT APPLICATION FORM, APPLICANT SHALL ALSO PROVIDE 2 COPIES OF PLANS SHOWING THE FOLLOWING:**


1. Site Plan on 8 ½" X 11" paper to scale (1"=20') showing location of pool, hot tub, or spa and showing required fence or enclosure (2 copies).
2. A fence completely enclosing the pool, hot tub, or spa. The enclosure shall be a minimum of 4 feet in height.
  - Maximum spacing between finish grade and the bottom of the enclosure shall be 2 inches.
  - Maximum spacing between vertical members shall not exceed 4 inches.
  - Maximum spacing between horizontal members shall not exceed 1 ¾ inches.
  - Maximum spacing between diagonal members shall not exceed 1 ¾ inches.

**EXCEPTION TO THE FENCE REQUIREMENT:** A residential swimming pool with a power safety cover or a residential spa with a safety cover complying with ASTM F 1346 does not require a fence enclosure.

3. If there are any gates in the fence they must be self-latching and have a latch not readily accessible to children.
  - Pedestrian access gates shall be self-closing and have a self-latching device.
  - The release mechanism shall be located on the pool side of the gate at least 3 inches below the top of the gate.
  - Maximum spacing between fence members shall not exceed ½ inch within 18 inches of the release mechanism.

**RESIDENTIAL INSTALLATIONS: SWIMMING POOL / HOT TUB / SPA PERMITS INCLUDE ANY ASSOCIATED MECHANICAL AND PLUMBING WORK AND INSPECTION. IF ELECTRICAL WORK WILL BE PERFORMED, A SEPARATE ELECTRICAL PERMIT WILL BE REQUIRED TO BE OBTAINED BY A LICENSED ELECTRICAL CONTRACTOR OR THE HOMEOWNER.**

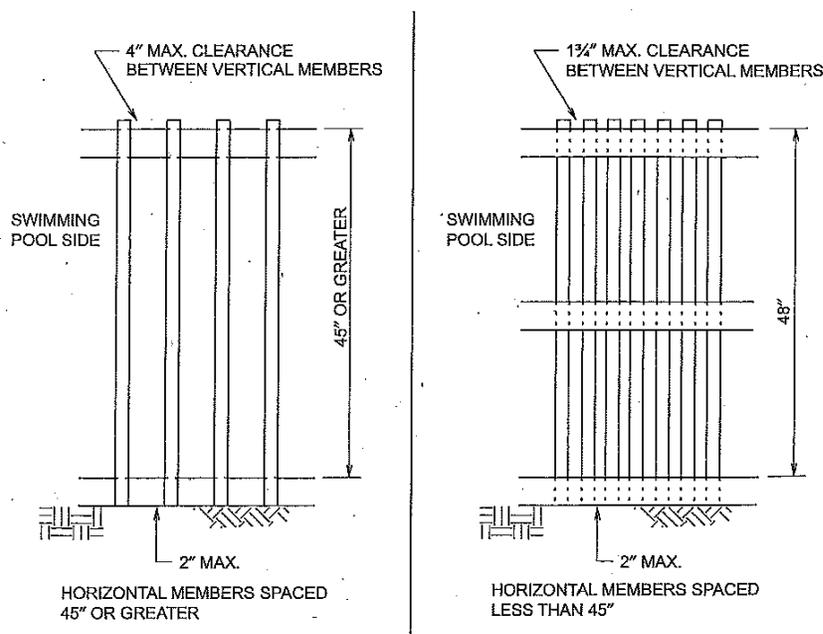

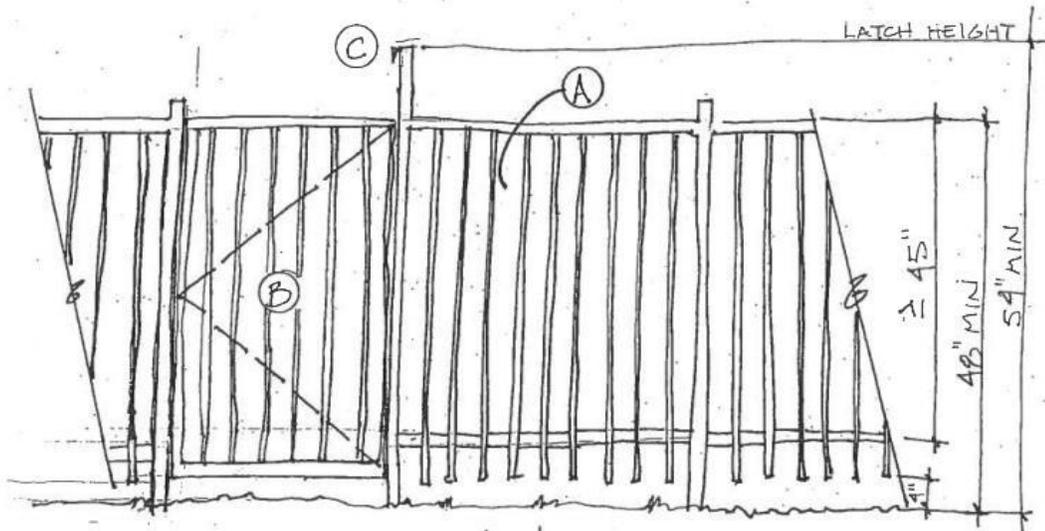


## BARRIER ELEV.

### Legend

- (A) Maximum opening space of 4".
- (B) Self-closing, latching gate
- (C) Gate release mechanism greater than 54" above grade.
- (D) Per NEC 680.41 emergency shut-off greater than 5' from tub but within site.

Note: An exception to the required barrier and gate is a lockable tub cover capable of carrying a load per ASTM F 1346

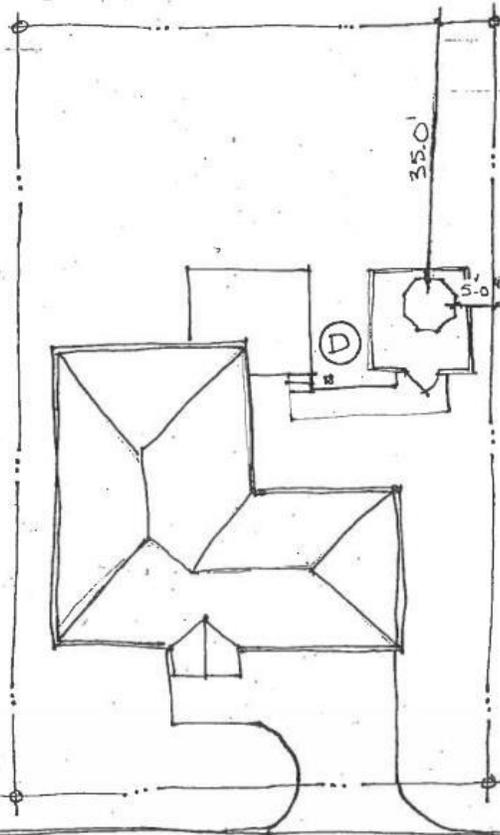

## SITE PLAN

1" = 20'-0"



# HOT TUB INSTALL REQUIREMENTS